



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : C08L 23/10, 51/06, 53/00, C08K 13/02 // (C08L 23/10, 51:06, 53:00) (C08K 13/02, 3:34, 3:36, 5:17, 5:20, 5:54, 9:04)</p>	A1	<p>(11) International Publication Number: WO 96/22328</p> <p>(43) International Publication Date: 25 July 1996 (25.07.96)</p>
<p>(21) International Application Number: PCT/NO96/00003</p> <p>(22) International Filing Date: 9 January 1996 (09.01.96)</p> <p>(30) Priority Data: 950160 16 January 1995 (16.01.95) NO</p> <p>(71) Applicant (for all designated States except US): BOREALIS A/S [DK/DK]; Lyngby Hovedgade 96, DK-2800 Lyngby (DK).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): BAANN, Henning [NO/NO]; Planerveien 34, N-3942 Skjelsvik (NO).</p> <p>(74) Agent: TANDBERGS PATENTKONTOR A/S; P.O. Box 7085, N-0306 Oslo (NO).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
<p>(54) Title: A POLYOLEFIN ALLOY WITH IMPROVED SURFACE HARDNESS AND SCRATCH RESISTANCE, AND PROCESSES FOR PRODUCING SAME</p> <p>(57) Abstract</p> <p>A polyolefin alloy with improved surface hardness and scratch resistance. The alloy contains a blend of 40 to 80 % by weight of a polypropylene material consisting of a polypropylene homopolymer or a copolymer of propylene with ethylene and/or butadiene; 1 to 10 % by weight of a functionalized polypropylene material consisting of a grafted polypropylene homopolymer or copolymer of propylene with ethylene and/or butadiene; and optionally up to 40 % by weight of ethylene/propylene/polyene terpolymer (EPDM); and further contains 1 to 50 % by weight of a mineral which has been surface-treated with aminosilane and 1 to 15 % by weight of amorphous, fatty acid amide-treated silica gel. The improved surface hardness and scratch resistance of the polyolefin alloy seems to be due to chemical reaction of the functionalized polypropylene material with the surface-treated mineral, and with the fatty acid amide-treated silica gel, respectively.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

A polyolefin alloy with improved surface hardness and scratch resistance, and processes for producing same.

5 The present invention relates to a polyolefin alloy with improved surface hardness and scratch resistance, and processes for producing same. More specifically, the invention relates to a polyolefin alloy on the basis of a polypropylene material, a functionalized polypropylene material, a mineral, an
10 amorphous silica gel and optionally an ethylene/propylene/polyene terpolymer (EPDM), as well as processes for producing said polyolefin alloy.

Various techniques for increasing the scratch resistance of
15 polyolefin materials are previously known, i.a. addition of silica materials. Thus, JP 1318051 (Toray Silicone KK) discloses polyolefins which for this purpose have been modified with a filler on silica basis. Said filler may have been surface treated with silane type compounds. However, the
20 disclosed polyolefins are not alloys and no fatty acid amide-treated silica gel is used in the material. JP 1104637 (Showa Denko KK) discloses materials on a polypropylene basis to which silica/alumina spheroids and a polypropylene material functionalized with carboxylic acid or carboxylic anhydride
25 have been added. These materials also contains no fatty acid amide-treated silica gel.

It has now been found that when a functionalized polypropylene material and an amorphous, fatty acid amide-modified silica
30 gel are incorporated into certain polyolefin materials having a mineral content, the scratch resistance of the material is substantially improved, with retention of the impact strength and the thermal shape stability (HDTA) of the material.

35 Thus, the invention provides a new polyolefin alloy having improved surface hardness and scratch resistance, and having a melt index MI in the range of 0.1 - 50 g/10 min at 230°C/2.16 kg, particularly in the range of 3 to 40 g/10 min at 230°C/-2.16 kg. The polyolefin alloy is characterized in that it is

constituted by a blend of:

- 5 (A) 40 to 80% by weight of a polypropylene material consisting of a polypropylene homopolymer or a copolymer of propylene with ethylene and/or butadiene, which polypropylene material may have a content of polymerized ethylene and/or butadiene units of 5 to 35 mole% and has a molecular weight Mw of 100,000 to 300,000 and a melt index MI of 0.1 to 20 g/10 min at 230°C/2.16 kg,
- 10 (B) 1 to 10% by weight of a functionalized polypropylene material consisting of a grafted polypropylene homopolymer or copolymer of propylene with ethylene and/or butadiene, having a degree of grafting of 0.2 to 10% by weight,
- 15 (C) 1 to 50% by weight of a mineral, having a mean particle size of about 2.5 μm and a maximum particle size of about 20 μm , and being surface-treated with 0.2 to 5% by weight of aminosilane,
- 20 (D) 1 to 15% by weight of amorphous fatty acid-treated silica gel, comprising 25 to 75% by weight of silica and 75 to 25% by weight of fatty acid amide,
- 25 (E) 0 to 40% by weight of an ethylene/propylene/polyene terpolymer (EPDM) having a melt index MI in the range of 1 to 10 g/10 min at 230°C/2.16 kg and a Shore D hardness of 30 to 70.

EP-A-0 567 058 (Hirano et al.) discloses compositions having improved elasticity, peeling strength and recoating properties, comprising a polypropylene, an ethylene/ α -olefin copolymer elastomer, and a modified polyolefin having a functional group in either or both ends thereof, as well as certain substituted amines/amides. In addition thereto, the compositions can also contain various additives, among which talc is mentioned. Said compositions of EP-A-0 567 058 do not, however, contain the combination of a functionalized polypropylene material of the same kind as component (B) of the polyolefin alloy of the present invention, with a mineral having been surface-treated with an aminosilane, and a fatty acid-treated

silica gel, and they do not suggest any improvement of the scratch resistance.

US 4 675 122 (Lüers et al.) teaches a combined antiblocking agent and lubricant concentrate based on polyolefin, which contains diatomaceous earth, precipitated silica and/or silica gel as the antiblocking agent, and one more more amides of unsaturated C_{18} - C_{22} fatty acids. No mention is made of any improvement of the scratch-resistance. Also, it could not be considered to be near at hand to combine the teaching of US 4 675 122 with the teaching of the above-discussed EP-A-0 567 058, which also does not mention scratch-resistance.

EP-A-0 297 693 (McKinney et al.) teaches a composition comprising an intimate mixture of at least one ethylene interpolymer with acrylic acid, methacrylic acid or an ionomer of either of said acids and a slip-enhancing amount of a secondary fatty acid amide. The composition may also contain small amounts of finely divided inorganic materials such as silica and talc. The aim of the invention of EP-A-0 297 693 is to improve the slip and/or block characteristics of the ethylene interpolymers. No mention is made of any improvement of the scratch-resistance. Even though said EP-A-0 297 693 is disclosing compositions in which silica may be used, and will come into contact with fatty acid amide, it is not question there of any fatty acid-treated silica gel comprising 25-75% by weight of silica and 75-25% by weight of fatty acid amide as in the polyolefin alloy of the present invention. To the extent a finely inorganic material is used in the composition of EP-A-0 297 693, no surface treatment thereof with aminosilane is mentioned, neither is there any mention of any functionalized polypropylene material. A similar composition is disclosed in EP-A-0 257 803 (Yamada et al.), comprising an ethylene/methyl methacrylate copolymer, a slip agent which may be a fatty acid amide, and a small amount (0.01-0.1 %wt) of an inorganic filler, which may be a silica or a talc. The composition is used to produce peelable protective films with low peeling strength for wrapping around e.g. rubbery articles having a tacky surface. Neither EP-A-0 257 803 nor EP-A-0 297 693

suggests the polyolefin alloy of the present invention having improved surface hardness and scratch-resistance.

US 5 286 791 (De Nicola et al.) discloses a filled composition
5 having improved flexural modulus and impact strength, comprising a propylene polymer material, a propylene polymer material grafted with one or more vinyl monomers, and a rubber component. As filler, the composition may contain i.a. talc and silica, and column 3, lines 25-37, of the patent indicates
10 that the filler may be coated with an organic compound. However, the patent does not suggest any fatty acid amide-treated silica gel in combination with an aminosilane-treated mineral and there is no suggestion in said patent that any such combination would improve the surface hardness and scratch-resistance
15 of a polyolefin alloy as defined according to the present invention.

The new polyolefin alloy of the present invention can be produced by blending the components (A), (B), (C) and (D), and
20 optionally utilized component (E); melting and preferably kneading the blend; and then cooling and granulating the obtained blend.

Alternatively, the new polyolefin alloy can be produced by
25 blending the components (A) and (B) and optionally utilized component (E); melting the blend; blending the components (C) and (D) into the melt, preferably with kneading of the blend; and then cooling and granulating the obtained blend.

30 The production of the polyolefin alloy can be effected in a mixer of any suitable type, for instance a continuous or batchwise mixer, although it is preferred to use an extruder.

Particularly suitable polypropylene materials (A) for use in
35 the new polyolefin alloy are copolymers of propylene and ethylene. A particularly suitable polypropylene material is a copolymer of propylene and ethylene having a content of 5 to 25% by weight of polymerized ethylene units.

Suitable functionalized polypropylene materials (B) for use in the new polyolefin alloy are polypropylene homopolymers and copolymers of propylene and ethylene and/or butadiene (B), grafted with a compound selected from maleic anhydride, acrylic acid, acrylates and methacrylates, vinyl silanes and other vinyl compounds. Particularly good results are obtained by grafting maleic anhydride on the polypropylene material. The functionalized polypropylene material can have a melt index MI in the range of 5 to 250 g/10 min at 230°C/2.16 kg, more preferably in the range of 10 to 150 g/10 min at 230°C/2.16 kg.

Suitable minerals (C) for use in the polyolefin alloy of the invention are finely divided minerals which have been silanized with one or more of the aminosilanes traditionally used for surface treatment of talc. Particularly suitable minerals for use in the alloy after such silanizing treatment are wollastonite, kaolin, mica, calcium carbonate and talc, particularly talc. Preferably, the treated mineral has a mean particle size D_{50} in the range of 0.5 to 10 μm , more preferably 1-6 μm .

The silica gel material (D) which is used in the polyolefin alloy of the invention is preferably a fatty amide-treated, amorphous, synthetic silica gel containing 40 to 65% by weight of silica and 60 to 35% by weight of fatty acid amide.

Ethylene/propylene/polyene terpolymers (EPDM) that are particularly useful as an optional component in the polymer alloy of the invention are such terpolymers which have an ethylene content of 30 to 90% by weight and a flow, determined according to the Mooney method (ML 101°C), of 0 to 60, more preferably 0 to 50.

Although the invention is not meant to be limited by any particular theory regarding the mechanism behind the improved surface hardness and scratch resistance achieved with the new polyolefin alloy, chemical reaction seems to take place between the functionalized polypropylene material (B) and the

surface-treated mineral (C), and between the functionalized polypropylene material (B) and the amorphous, fatty acid amide-treated silica gel (D).

- 5 The following examples illustrate the preparation of the new polyolefin alloys of the invention. The following properties of the prepared alloys were measured:

10 Modulus of elasticity: Measured at 23°C according to ISO 527 (MPa).

Notched Izod: Measured at -40°C according to ISO VSI 180/1A (kJ/m²).

Thermal shape stability (HDTA): Measured according to ISO 75 (°C).

15 Shrinkage: Calculated directly (in %) from measurements of length and width of a stamped square of a sheet of thickness 2 mm, moulded under given injection moulding conditions. The test sheets for each pair of Example illustrating the invention and Comparison Example were moulded under the same moulding conditions.

20 Scratch resistance: Measured with an Ericsson pen according to ISO 1518.

25 Example 1

An alloy on polypropylene basis was prepared from the following components:

A. A copolymer of propylene and ethylene containing 14% by weight of polymerized ethylene and having a melt index
30 MI of 8.0 g/10 min at 230°C/2.16 kg.

B. A polypropylene functionalized with maleic anhydride (MAH), containing 0.7% by weight of MAH and having a melt index MI of 200 g/10 min at 230°C/2.16 kg.

C. A talc the surface of which has been treated with
35 1.5 to 2.0% by weight of aminosilane, said talc having a density of 330 kg/m³ and a particle size D₅₀ of 2 to 5 µm.

D. An amorphous, synthetic, fatty acid amide-treated silica gel, containing 40 to 50% by weight of fatty acid amide (essentially 13-docoseneamide), having a density of 300 kg/m³

and a particle size D_{50} of 2 to 4 μm .

E. A low crystallinity ethylene/propylene/polyene terpolymer (EPDM) containing 47% of polymerized ethylene and having a density of 870 kg/m^3 and melt index MI of 0.6 g/10 min at 230°C/2.16 kg.

The alloy was prepared in a "Werner & Pfleiderer" double screw extruder, type ZSK, having 57 mm co-rotating screws. Before and after the preparation, the hopper was flushed with nitrogen gas in order that the preparation should take place in an approximately inert atmosphere. The screw speed was 200 rpm and the rate of extrusion was 80 kg/h. All the raw material was introduced gravimetrically at feed point 1. The temperature profile of the extruder was maintained in the range of 210 to 230°C. The components added, the amounts thereof (in % by weight of the total blend) and the results are given in the table below. Fig. 1 shows the appearance of a test sample of the alloy after the scratch resistance having been measured with an Ericsson pen according to ISO 1518.

20

Example 2 (Comparison example)

The procedure of Example 1 was followed, with the exception that the fatty acid amide-treated silica gel (component D) was omitted. The added components, the amounts thereof (in % by weight of the total blend) and the results are given in the table below. Fig. 2 shows the appearance of a test sample of the alloy after the scratch resistance having been measured with an Ericsson pen according to ISO 1518.

30

Example 3

It was proceeded as in Example 1, with the exception that the amount of talc (component C) was increased from 10% by weight to 30% by weight. The added components, the amounts thereof (in % by weight of the total blend) and the results are given in the table below. Fig. 3 shows the appearance of a test sample of the alloy after the scratch resistance having been measured with an Ericsson pen according to ISO 1518.

Example 4 (Comparison example)

It was proceeded as in Example 2, with the exception that the amount of talc (component C) was increased from 10% by weight to 30% by weight. The added components, the amounts thereof (in % by weight of the total blend) and the results are given in the table below. Fig. 4 shows the appearance of a test sample of the alloy after the scratch resistance having been measured with an Ericsson pen according to ISO 1518.

10

15

20

25

30

35

Table
Preparation of alloys on polypropylene basis, having improved scratch resistance.

Ex.	PP ¹⁾ (% wt)	PP-g- MAH ²⁾ (% wt)	Talc ³⁾ (% wt)	Silica gel ⁴⁾ (% wt)	EPDM (% wt)	E-modu- lus (MPa)	Izod -40°C (J/m)	HDTA (°C)	Shrink- age (%)	Scratch resist. (7,5 N)
1	70	5	10	5	10	1450	60	52	1,3	3
2 (Comp.)	80	-	10	-	10	1600	50	54	1,3	0,5
3	50	5	30	5	10	2100	50	64	1,0	5
4 (Comp.)	60	-	30	-	10	2400	35	68	0,7	1

1) A copolymer of propylene and ethylene with 14% by weight of polymerized ethylene and a MI 8.0 g/10 min at 230°C/2.16 kg.

2) A polypropylene functionalized with MAH, having a MAH content of 0.7% by weight and a MI of 200 g/10 min at 230°C/2.16 kg.

3) A talc surface-treated with 1.5 - 2.0% by weight of aminosilane, having a density of 330 kg/m³ and a particle size D₅₀ på 2-5 µm.

4) An amorphous, synthetic, fatty acie amide-treated silica, containing 40-50% by weight of fatty acid amide, and having a density of 300 kg/m³ and a particle size D₅₀ of 2-4 µm.

5) A low crystallinity ethylene/propylene/terpolymer (EPDM) containing 47% of polymerized ethylene, having a density of 870 kg/m³ and a melt index MI of 0.6 g/10 min at 230°C/2.16 kg.

It can be seen from the results given in the above table, by comparing Example 1 illustrating the invention and Comparison Example 2 illustrating the prior art, that addition of 5% by weight of fatty acid amide-treated silica gel substantially improves the scratch resistance of the alloy, which increases from 0.5 to 3. This improvement is also clearly seen by comparing Fig. 1, which shows the surface of a test sample of the alloy of Example 1 after the scratch resistance having been measured, with Fig. 2, which is a similar picture of a test sample of the alloy of Example 2. The table further shows that essential properties such as stiffness (E modulus) and shrinkage are improved with the new technology, while the notched bar impact (Izod) at -40°C and the thermal shape stability (HDTA) are retained unaltered or are somewhat reduced.

15

A similar comparison between the results obtained for the alloys of Example 3 and Example 4 (comparison example), in which examples 30% by weight of talc was used (vs. 10% by weight in Examples 1 and 2), shows that a substantial increase in the scratch resistance is achieved by adding 5% by weight of fatty acid amide-treated silica gel, said scratch resistance increasing from 1 to 5. The improvement is also clearly seen by comparing Fig. 3, which shows the surface of the new alloy of Example 3 after the scratch resistance having been measured, with Fig. 4, which is a similar picture of the alloy of Example 4. It also appears from the table that the E modulus and the shrinkage are improved for the alloy of Example 3, while the notched bar impact (Izod) at -40°C and the thermal shape stability (HDTA) are retained unaltered or are somewhat reduced.

35

Patent claims

1. A polyolefin alloy having improved surface hardness and scratch resistance, and having a melt index MI in the range of 0.1 to 50 g/10 min at 230°C/2.16 kg, particularly in the range of 3 to 40 g/10 min at 230°C/2.16 kg, characterized in that it is constituted by a blend of:

- (A) 40 to 80% by weight of a polypropylene material consisting of a polypropylene homopolymer or a copolymer of propylene with ethylene and/or butadiene, which polypropylene material may have a content of polymerized ethylene and/or butadiene units of 5 to 35 mole% and has a molecular weight Mw of 100,000 to 300,000 and a melt index MI of 0.1 to 20 g/10 min at 230°C/2.16 kg,
- (B) 1 to 10% by weight of a functionalized polypropylene material consisting of a grafted polypropylene homopolymer or copolymer of propylene with ethylene and/or butadiene, having a degree of grafting of 0.2 to 10% by weight,
- (C) 1 to 50% by weight of a mineral, having a mean particle size of about 2.5 µm and a maximum particle size of about 20 µm, and being surface-treated with 0.2 to 5% by weight of aminosilane,
- (D) 1 to 15% by weight of amorphous fatty acid-treated silica gel, comprising 25 to 75% by weight of silica and 75 to 25% by weight of fatty acid amide,
- (E) 0 to 40% by weight of an ethylene/propylene/polyene terpolymer (EPDM) having a melt index MI in the range of 1 to 10 g/10 min at 230°C/2.16 kg and a Shore D hardness of 30 to 70.

2. A polyolefin alloy according to claim 1, characterized in that the functionalized polypropylene homopolymer or copolymer of propylene with ethylene and/or butadiene (B) is grafted with a compound selected from maleic anhydride, acrylic acid, acrylates and methacrylates, vinyl silanes and

other vinyl compounds, preferably maleic anhydride.

3. A polyolefin alloy according to claim 1 or 2, characterized in that the polypropylene material (A) is a copolymer of propylene and ethylene and has a content of 5 to 25% by weight of polymerized ethylene units.

4. A polyolefin alloy according to any of claims 1 to 3, characterized in that it is constituted by a blend of:

60 to 80 % by weight of (A);
2,5 to 7,5 % by weight of (B);
7,5 to 35 % by weight of (C);
2,5 to 7,5 % by weight of (D);
0 to 25 % by weight of (E).

5. A polyolefin alloy according to any of claims 1 to 4, characterized in that the functionalized polypropylene material (B) has a degree of grafting of 0.5 to 2% by weight.

6. A polyolefin alloy according to any of claims 1 to 5, characterized in that the surface-treated mineral (C) has been surface-treated with about 1% by weight of amino silane.

7. A polyolefin alloy according to any of claims 1 to 6, characterized in that the mineral (C) is selected from wollastonite, kaolin, mica, calcium carbonate and talc.

8. A polyolefin alloy according to claim 7, characterized in that the mineral (C) is talc.

9. A process for producing a polyolefin alloy according to any of claims 1 to 8, characterized by the steps of blending the components (A), (B), (C) and (D) and optionally utilized component (E); melting and preferably kneading the blend; and then cooling and granulating the obtained blend.

10. A process for producing a polyolefin alloy according to any of claims 1 to 8, characterized by the steps of blending the components (A) and (B) and optionally utilized com-

ponent (E); melting the blend; blending the components (C) and (D) into the melt, preferably with kneading of the blend; and then cooling and granulating the obtained blend.

5

10

15

20

25

30

35

1/2

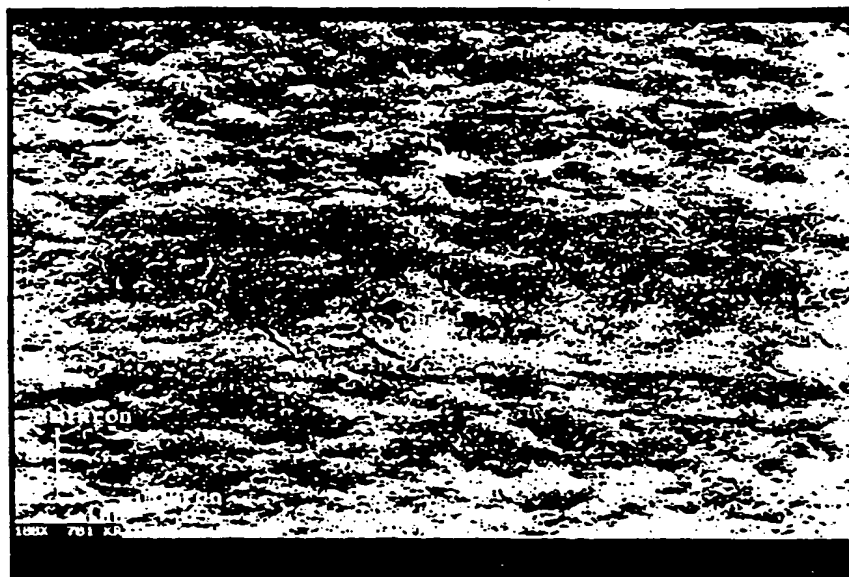


FIG. 1



FIG. 2

2/2


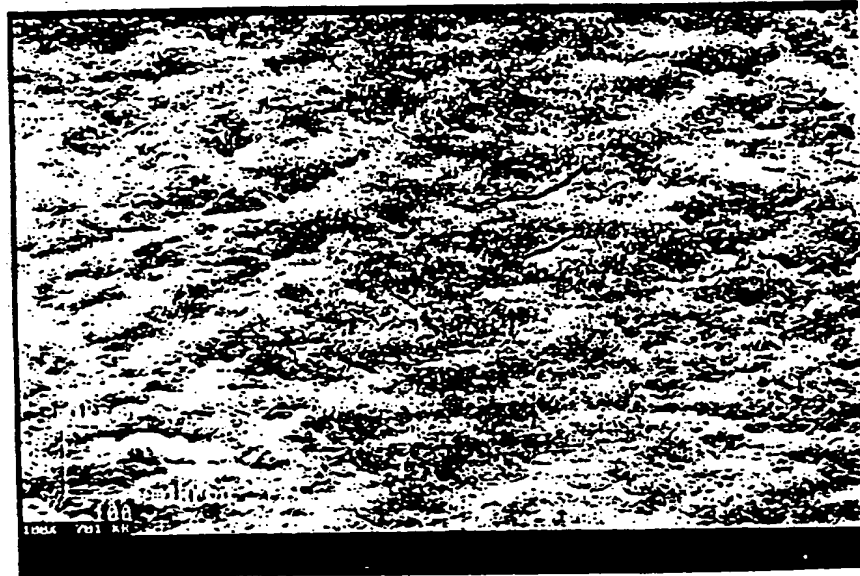


FIG. 3

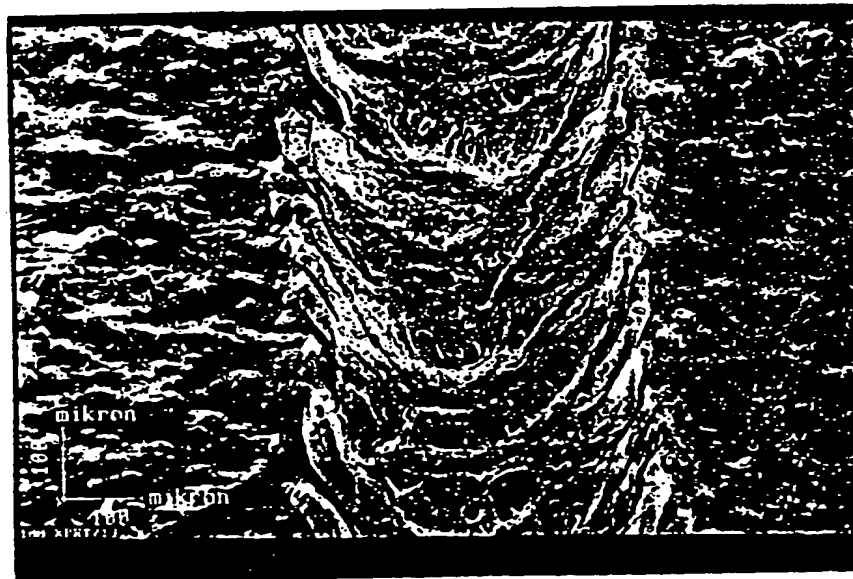

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 96/00003

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: C08L 23/10, C08L 51/06, C08L 53/00, C08K 13/02 // (C08L 23/10, 51:06, 53:00), (C08K 13/02, 3:34, 3:36, 5:17, 5:20, 5:54, 9:04)
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: C08L, C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 9321269 A1 (ICI AUSTRALIA OPERATIONS PROPRIETARY LIMITED), 28 October 1993 (28.10.93), page 1 line 29 - page 2 line 20, page 4 line 6 - page 5 line 22, page 6 line 3 - line 17, page 7 line 21 - line 31 --	1-10
Y	US 4675122 A (GEORG LUERS ET AL), 23 June 1987 (23.06.87), abstract --	1-10
A	WO 9418267 A1 (IMPERIAL CHEMICAL INDUSTRIES PLC), 18 August 1994 (18.08.94), abstract, page 6 line 20 - line 24 --	1,7-10

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

Z document member of the same patent family

Date of the actual completion of the international search

18 April 1996

Date of mailing of the international search report

19.04.96

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Monika Bohlin
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 96/00003

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9303095 A1 (IMPERIAL CHEMICAL INDUSTRIES PLC), 18 February 1993 (18.02.93), abstract, page 6 paragraph 2, page 8 paragraph 2 --	1,2-3,7-10
A	EP 0508415 A2 (NIPPON PETROCHEMICALS COMPANY, LIMITED), 14 October 1992 (14.10.92), abstract, page 2 line 46 - page 4 line 6, page 6 line 23 - line 33, page 7 line 26, page 8 line 21 - line 24 --	1-5,7-10
A	Dialog Information Services, file 351, DERWENT WPI, Dialog accession no. 007896779, WPI accession no. 89-161891/22, SHOWA DENKO KK: "Propylene polymer compsn. - comprises crystalline polypropylene silica-alumina balloons and propylene polymer treated with unsatd. carboxyl functional cpd. and peroxide"; & JP,A,1104637 A 890421 8922 (Basic) --	1-2
A	EP 0265075 A2 (MITSUI TOATSU CHEMICALS, INCORPORATED), 27 April 1988 (27.04.88), abstract, page 4 line 24 - line 39 and line 47 - line 48 -- -----	6

INTERNATIONAL SEARCH REPORT

01/04/96

International application No.

PCT/NO 96/00003

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO-A1-	9321269	28/10/93	NONE		
US-A-	4675122	23/06/87	AU-B,B-	578081	13/10/88
			AU-A-	4034285	02/10/86
			CA-A-	1247076	20/12/88
			DE-A-	3337356	25/04/85
			DE-A-	3475719	26/01/89
			EP-A,A,A	0138203	24/04/85
			SE-T3-	0138203	
			JP-B-	7013159	15/02/95
			JP-A-	61241107	27/10/86
WO-A1-	9418267	18/08/94	NONE		
WO-A1-	9303095	18/02/93	AU-A-	2362892	02/03/93
			EP-A-	0596932	18/05/94
			JP-T-	6509378	20/10/94
EP-A2-	0508415	14/10/92	JP-A-	5132589	28/05/93
			US-A-	5473016	05/12/95
			JP-A-	5039367	19/02/93
			JP-A-	5132595	28/05/93
EP-A2-	0265075	27/04/88	CA-A-	1300778	12/05/92
			DE-A-	3774532	19/12/91
			JP-C-	1716143	27/11/92
			JP-B-	4002620	20/01/92
			JP-A-	63095252	26/04/88

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.